



Reliable Communication

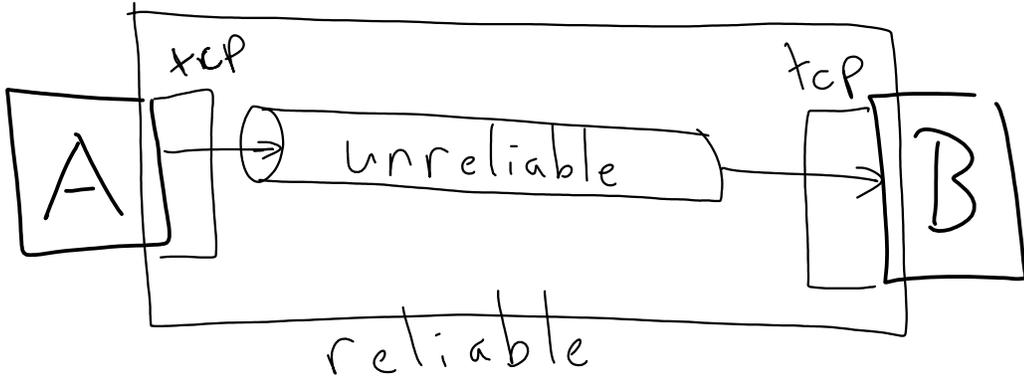


rdt 1.0 - no problems




rdt 2.0 - bit errors

sender

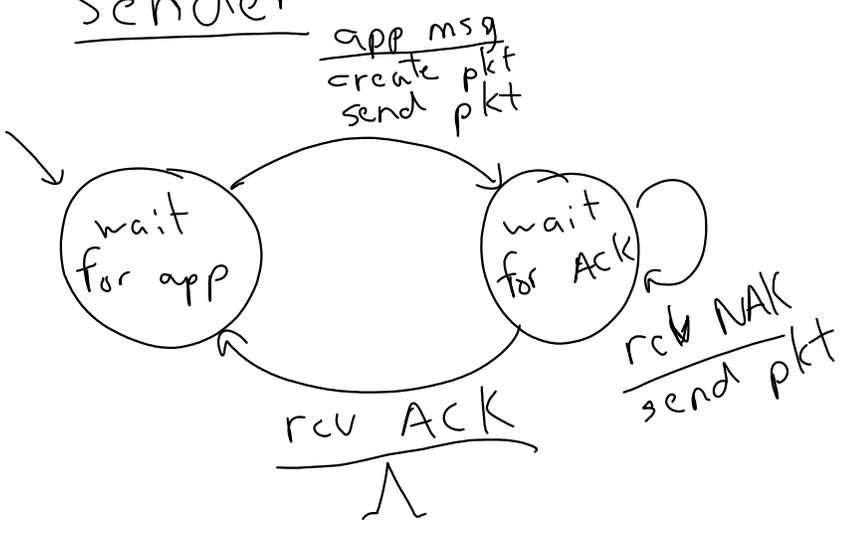

receiver

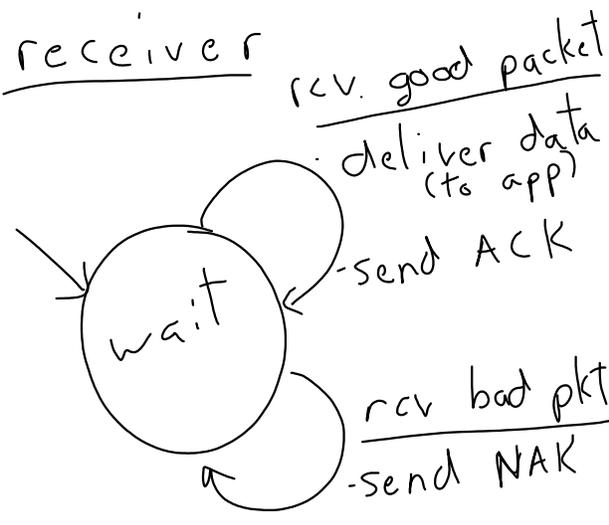

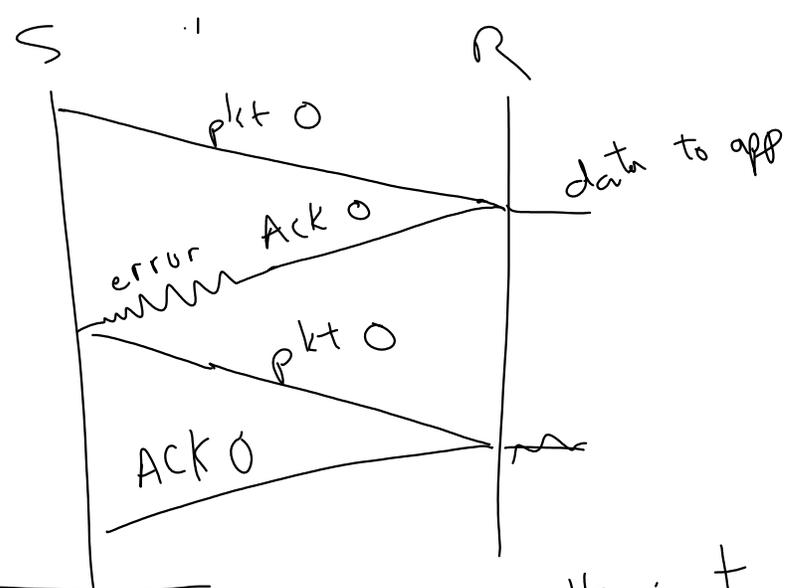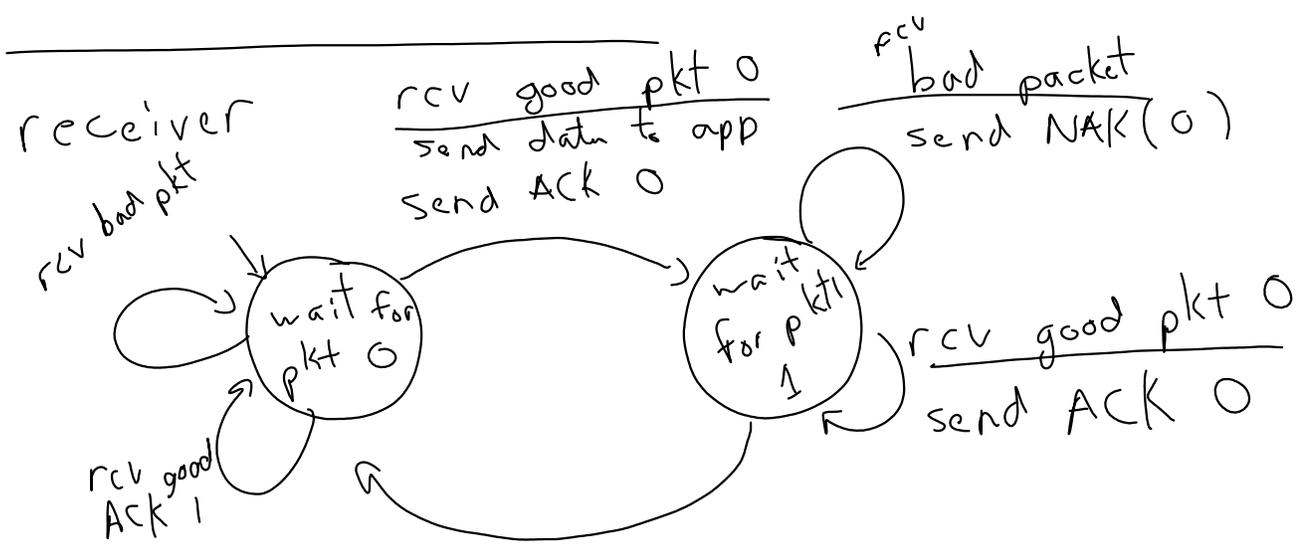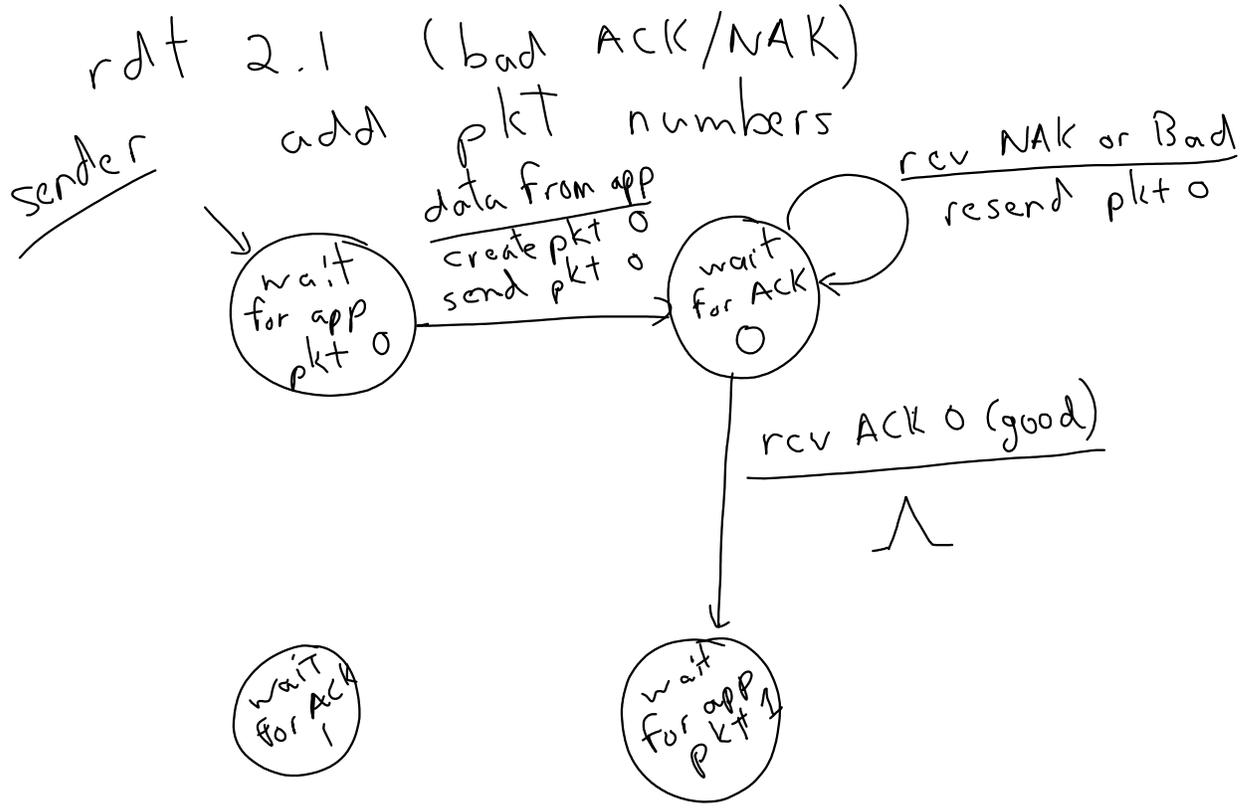

rdt 2.2 use ACK w/ wrongy seq.# instead of NAK

Hex	bin
0	0000
1	0001
2	0010
3	0011
4	0100
5	0101
6	0110
7	0111

Hex	bin
8	1000
9	1001
A	1010
B	1011
C	1100
D	1101
E	1110
F	1111

